




GOLDEN  
WOOD

EMIL  
CERAMICA


---

STILE SENZA TEMPO

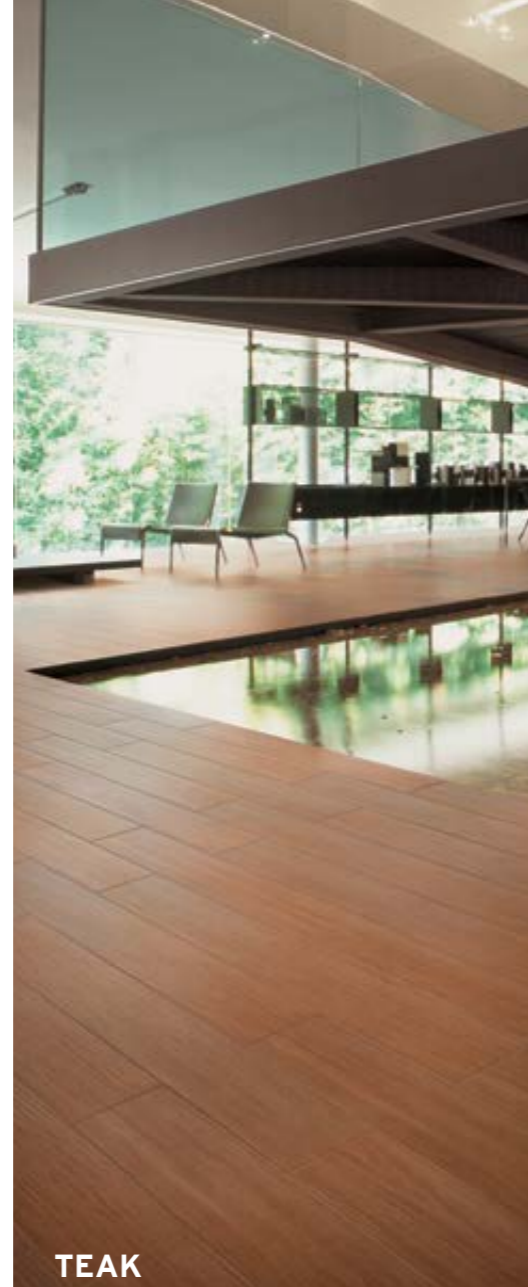

## Pezzi speciali


Trims/Pièces spéciales/  
Formteile/Piezas especiales/  
Специальные Изделия



**GRADONE RETT.**  
45x30x4.5x3.5  
(17<sup>11/16</sup>"x11<sup>13/16</sup>"x1<sup>3/4</sup>"x1<sup>3/8</sup>"



**454N0RG** WHITE ●59  
**454N2RG** TEAK ●59  
**454N3RG** OAK ●59  
**454N6RG** WENGE ●59  
**454N9RG** BURNED ●59



**GRADONE ANGOLARE RETT.**  
30x30x4.5x3.5  
(11<sup>13/16</sup>"x11<sup>13/16</sup>"x1<sup>3/4</sup>"x1<sup>3/8</sup>"



**314N0A/D-S** WHITE ●69  
**314N2A/D-S** TEAK ●69  
**314N3A/D-S** OAK ●69  
**314N6A/D-S** WENGE ●69  
**314N9A/D-S** BURNED ●69



**BATTISCOPA RETT.**  
9x45  
(3<sup>9/16</sup>"x17<sup>11/16</sup>"



**844N0R** WHITE ●10  
**844N2R** TEAK ●10  
**844N3R** OAK ●10  
**844N6R** WENGE ●10  
**844N9R** BURNED ●10

WHITE

TEAK

WENGE

OAK

BURNED

## Formati—Sizes/Formats/Formate/Tamaños/Форматы



22.5x90 Naturale Rett. (8<sup>7/8</sup>"x35<sup>7/16</sup>"  
**924N0R** White ●771  
**924N2R** Teak ●771  
**924N3R** Oak ●771  
**924N6R** Wenge ●771  
**924N9R** Burned ●771



15x90 Naturale Rett. (5<sup>7/8</sup>"x35<sup>7/16</sup>"  
**914N0R** White ●771  
**914N2R** Teak ●771  
**914N3R** Oak ●771  
**914N6R** Wenge ●771  
**914N9R** Burned ●771




15x60 Naturale Rett. (8<sup>7/8</sup>"x23<sup>5/8</sup>"  
**974N0R** White ●662  
**974N2R** Teak ●662  
**974N3R** Oak ●662  
**974N6R** Wenge ●662  
**974N9R** Burned ●662


Si consiglia la posa sfalsata a 2/3 e con fuga 2 mm - Staggered laying at 2/3 with a mm-joint is recommended.

## MOSAICO\*


Tessera 2.8x2.8  
Chip (1<sup>1/8</sup>"x1<sup>1/8</sup>"




30x30 (11<sup>13/16</sup>"x11<sup>13/16</sup>"  
**I304N0** White ●99



30x30 (11<sup>13/16</sup>"x11<sup>13/16</sup>"  
**I304N2** Teak ●99



30x30 (11<sup>13/16</sup>"x11<sup>13/16</sup>"  
**I304N3** Oak ●99



30x30 (11<sup>13/16</sup>"x11<sup>13/16</sup>"  
**I304N6** Wenge ●99



30x30 (11<sup>13/16</sup>"x11<sup>13/16</sup>"  
**I304N9** Burned ●99

\* su rete\_mesh-mounted\_sur trame\_auf netz geklebt\_sobre red\_на сетке

## LISTELLO CUT



15x90 (5<sup>7/8</sup>"x35<sup>7/16</sup>"  
**MCF4N0** White/Burned ●43



15x90 (5<sup>7/8</sup>"x35<sup>7/16</sup>"  
**MCF4N3** Oak/Teak ●43



15x90 (5<sup>7/8</sup>"x35<sup>7/16</sup>"  
**MCF4N6** Wenge/Oak ●43



## LISTELLO GEM



3x90 (1<sup>3/16</sup>"x35<sup>7/16</sup>"  
**L904N0R** White ●36



3x90 (1<sup>3/16</sup>"x35<sup>7/16</sup>"  
**L904N2R** Teak ●36



3x90 (1<sup>3/16</sup>"x35<sup>7/16</sup>"  
**L904N3R** Oak ●36



3x90 (1<sup>3/16</sup>"x35<sup>7/16</sup>"  
**L904N6R** Wenge ●36



3x90 (1<sup>3/16</sup>"x35<sup>7/16</sup>"  
**L904N9R** Burned ●36



## BACCHETTA

1x60 (3<sup>18</sup>"x23<sup>5/8</sup>"  
**L9830** Alluminio lucido ●57



1x60 (3<sup>18</sup>"x23<sup>5/8</sup>"  
**L9831** Alluminio satinato ●57



1.5x60 (9<sup>1/16</sup>"x23<sup>5/8</sup>"  
**L9866** Wenge ●57



# GOLDEN WOOD



1029974 Rev.1 - 05/04/2013

Dry - Pressed Ceramic Tiles ISO 13006 : 2012 Annex G - UNI EN 14411 : 2012 Annex G - Bla GL

CARATTERISTICHE TECNICHE Technical Features - Caracteristiques Techniques Technische Eigenschaften - Caracteristicas Tecnicas Технические Характеристики		NORMA Standard Norme - Norm Norma - Норма	VALORI Value - Valeur Vorgabe - Valor Средние
	PLANARITÀ Flatness - Planéité - Ebenflächigkeit - Planiyud - Плоскостность	UNI EN ISO 10545/2	± 0,26% / ± 1,5mm
		ASTM C485 Warpage	-
		Calibrated ± 0,75% (max ± 0,09 in)	-
	Rectified ± 0,40% (max ± 0,05 in-size ≤ 60cm) (max ± 0,07 in-size > 60cm)	± 0,25% (max ± 0,05 in-size ≤ 60cm) (max ± 0,07 in-size > 60cm)	
	ASSORBIMENTO D'ACQUA - Valore medio in % Water absorption - Average value expressed in % - Absorption d'eau - Valeur moyenne en % Wasseraufnahme - Durchschnittswert in % - Absorción de agua - Valor medio en % Поглощение воды	UNI EN ISO 10545/3 ASTM C373	Conforme Compliant
	RESISTENZA ALLA FLESSIONE Modulus of rupture - Resistance a la flexion - Biegefestigkeit - Resistencia a la flexion Прочность на изгиб	UNI EN ISO 10545/4	≥ 50 N/mm <sup>2</sup>
	FORZA DI ROTTURA Breaking strength - Résistance à la rupture - Bruchlast - Resistencia a la rotura Разрывное усилие	UNI EN ISO 10545/4 ASTM C648	≥ 2000 N 700 LBS
	RESISTENZA AL GELO Frost resistance - Résistance au gel - Frostbeständigkeit - Resistencia a las heladas Морозостойкость	UNI EN ISO 10545/12 ASTM C1026	Conforme Unaffected
	RESISTENZA CHIMICA ad alte e basse concentrazioni di acidi e basi Chemical resistance to high and low acid and basic concentrations Résistance chimique aux hautes et basses concentrations d'acides et de bases Chemikalienfestigkeit bei hohen und niedrigen Konzentrationen von Säuren und Basen Resistencia química con concentraciones altas y bajas de ácidos y bases Химическая стойкость к высоким и низким концентрациям кислот и щелочей	UNI EN ISO 10545/13 ASTM C-650	GA - GLA - GHA Unaffected
	RESISTENZA ALLE MACCHIE Stain resistance - Résistance aux taches Fleckenbeständigkeit - Resistencia a las manchas - Стойкость к образованию пятен	UNI EN ISO 10545/14 CTI 81-7D	5 No Evident Variation
	COEFFICIENTE DI ATTRITO Slip resistance - Coefficient de glissement - Rutschfestigkeit Barfußbereich Coeficiente de atrito medio - Коэффициент трения	DIN 51130 DIN 51097 ANSI A 137.1 - 2012 DCOF ( Section 9.6 ) B.C.R.A.	R9 - Dry: 0,69* / Wet: 0,63* ≥ 0,40

\* Values obtained with certificate n° 20120014. Date 12/17/2012.

PER MAGGIORI CHIARIMENTI SUI DATI TECNICI E SULLA GARANZIA CONSULTARE IL CATALOGO GENERALE IN VIGORE. For further information on technical specifications, please consult our up-dated general catalogue. Pour toutes informations supplémentaires sur les données techniques et sur les garanties, veuillez consulter le catalogue general en vigueur. Für weitere Informationen über technische Daten und Garantie beziehen sie sich bitte auf den aktuellen Gesamtkatalog. Para ultiores informaciones sobre los datos tecnicos y la garantia, vease el catalogo general en vigor. Более подробную информацию о технических данных и гарантии смотрите в действующем сводном катал.



## IMBALLI E PESI

PACKING AND WEIGHT - EMBALLAGES ET POIDS - VERPACKUNG UND GEWICHT - EMBALAJES Y PESOS - УПАКОВКА И ВЕС

Articolo Item Reference Artikel Articulo Артикула	Formato Size Format Format Тamaño Формат cm.	Spessore Thickness Epaisseur Stärke Espesor Толщина mm.	Pz. xMq. Pieces xSqM Pcs xM <sup>2</sup> Stk. xQm Pzs xMc. Шт. x Кв.М.	Pz. x Scat. Pieces x Box Pcs / Bte Stk. x Krt. Pzs x Caja Шт. x Кор.	Mq. x Scat. SqM x Box M <sup>2</sup> / Bte Qm x Krt. Mc. x Caja Кв.М. x Кор.	Peso x Scat. Weight x Box Poids / Bte Gewicht x Krt Peso x Caja Вес x Кор. kg	Scat. x Pal. Boxes x Pal. Bte / Pal. Krt. x Pal. Cajas x Pal. Кор. x Подд.	Mq. x Pal. SqM x Pal. M <sup>2</sup> / Pal. Qm x Pal. Mc. x Pal. Кв.М x Подд.	Peso x Pal. Weight x Pal. Poids / Pal. Gewicht x Pal. Peso x Pal. Вес x Подд. kg
924N_R	22,5x90	11,0	4,94	6	1,215	28,70	36	43,74	1033
914N_R	15x90	11,0	7,41	6	0,810	19,20	45	36,45	864
974N_R	15x60	11,0	11,11	12	1,080	25,00	50	54,00	1250
I304N_	30x30	11,0	11,11	5	0,450	10,70	-	-	-

Emilceramica S.p.A.



**EMIL CERAMICA**  
STILE SENZA TEMPO

EMILCERAMICA S.p.A.  
Via Ghiarola Nuova 29  
41042 Fiorano Modenese (Mo) - Italy  
Tel. +39 0536 835111  
Italy fax: +39 0536 835958  
Export fax: +39 0536 835490  
www.emilceramica.it